

## 가

2/4 가 가 , . . 93 12.2% 가 , 가 15.6% 1/4 가 15.6%, 9.0%, 5.5% 가 . 가 3 1/4 가 52 4800 93 14.5% 가 . 가 가 15.6% , 3 가 가 PP 가 18 8100 22.2% 가, 가 가

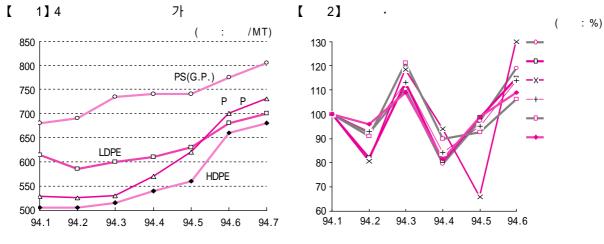

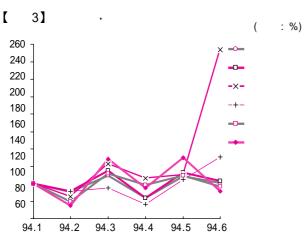

26 2400 PVC 가 17 4700 10.2% 가 , 27.1% 3 6400 6400 . EG 1/4 가 16 8600 13% 가 , 3700 100 AN 1/4 2 8600 , 38.2% 가 , 8 6800 93 12.1% 가 가 , 가 5.5% PA 가 1/4 4800 フト , フト , 1 8800 32.4% . 93 1/4 1000 380% 가 . PA 2 7300 56% 가 가 .

[ ] (1994.1~5) ( : 1000M/T, %)

		1993	1994		1993	1994		1993	1994		1993	1994	
		1,249.4	1,456.5	16.6	-	-	-	49.1	152.2	210.0	1,200.0	1,304.3	8.7
		725.6	830.9	14.5	26.1	37.2	42.5	60.4	29.1	51.8	691.3	839.0	21.4
		192.8	229.0	18.8	-	-	-	86.9	101.0	16.2	105.9	128.0	20.9
	S M	505.9	565.6	11.8	49.8	56.6	13.7	140.7	165.8	17.8	415.0	456.4	10.0
	V C M	261.8	283.4	8.3	66.0	48.3	26.8	4.6	0.9	80.4	323.2	330.8	2.4
	LDPE	322.5	382.0	18.4	7.9	5.4	31.6	114.1	135.8	19.0	216.3	251.6	16.3
	HDPE	451.7	519.9	15.1	4.3	3.1	27.9	228.4	244.0	6.8	227.6	279.0	22.6
	Р Р	555.4	649.1	16.9	3.1	3.9	25.8	298.5	352.6	18.1	260.0	300.4	15.5
	P S	305.9	312.0	2.0	10.7	13.1	22.4	124.8	112.8	9.6	191.8	212.3	10.7
	A B S	130.8	154.6	18.2	1.5	2.7	80.0	59.6	70.4	18.1	72.7	86.9	19.5
	P V C	333.6	341.8	2.5	23.4	25.2	7.7	74.3	52.2	29.7	282.7	314.8	11.4
		2,099.9	2,359.4	12.4	50.9	53.4	4.9	899.7	967.8	11.6	1,251.1	1,445.0	15.5
	A N	35.2	40.6	15.3	88.6	101.0	14.0	0.1	3.5	-	123.7	138.1	7.0
	CPLM	40.0	42.2	5.5	77.7	84.5	8.8	-	0.3	-	117.7	126.4	7.4
	TPA	533.5	575.6	7.9	61.0	69.4	13.8	18.4	22.7	23.4	576.1	622.3	8.0
	D M T	43.5	48.1	11.1	13.4	12.1	9.7	11.2	12.3	9.8	45.5	47.9	5.3
	E G	140.9	148.5	5.4	115.6	134.6	16.4	7.9	0.1	98.7	248.6	283.0	13.8
		792.9	855.0	7.8	356.3	401.6	12.7	37.6	38.9	3.5	1,111.6	1,217.7	9.5
	S B R	59.3	64.3	8.4	12.2	13.7	12.3	21.9	25.4	16.0	49.6	52.6	6.0
	B R	35.0	42.7	22.0	4.6	3.5	23.9	15.5	20.9	34.8	24.1	25.3	5.0
		94.3	107.0	13.5	16.8	17.2	2.4	37.4	46.3	23.8	73.7	77.9	5.7
3		2,987.1	3,321.4	11.2	424.0	472.2	11.4	974.7	1,053.0	8.0	2,436.4	2,740.6	12.5

가 12%, 가 14%, 가 1% 20%, 13% 4 5

< 1994/8/1>