


Butadiene

가 94

94 54 7000 92 37 6100 , 93 48 3600 45.3%,
 14.4% 가 , , 54 7000 93 47 9700 13.9% .
 28 8000 93 25 8200 11.7% 가 10%

(: M/T, %)							
		1992		1993		1994	
		376,088	483,627	28.6	546,640	14.4	
		-	-	-	-	-	
		376,088	483,627	28.6	546,640	14.4	
		240,721	258,238	7.3	288,364	11.7	
		132,935	221,422	66.6	258,196	16.6	
		373,656	479,660	28.4	546,560	13.9	

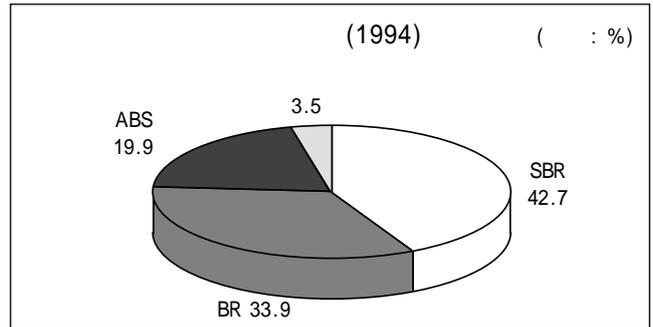

) CRI

가

가

94 2/4

() (: M/T, %)						
	1990	1991	1992	1993	1994	
S B R	74,443	76,827	84,912	108,512	137,945	42.7
B R	63,419	63,420	84,520	93,523	109,458	33.9
A B S	27,736	32,314	40,655	57,653	64,276	19.9
	-	9,339	27,605	14,521	11,416	3.5
	165,598	181,900	237,692	274,209	323,095	100.0

3D

가

가

가 1 100%
 2000 SM가
 가 94
 11 92 96
 7% 95 1/4
 117 10%
 가
 94 1/4 100
 166, SM 580 1200
 , SBR 13 8000 42.7% , BR 10 9500
 33.9%, ABS가 6 4200 19.9%

94
 257

BR SBR

가

, SBR 13 8000

42.7%

, BR 10 9500

33.9%, ABS가 6 4200

19.9%

< 96

>