

PB

(Polybutene, PB) 93

94 PB 5300~6400 Nisseki, Idemitsu, Nissan 3 4800~5440 , 92

Amoco, Exxon 640~960 , 320 가

3000~3500 , 1500~2000 ,

300~400 , 500 가

93 7500 92 2000 60.7% 4550

94 8300 4390

2050 1880

50% 가


33.3%, 15%, 1.7%

94 4380 , 4300 100

95 80% 가 8000 가

4000 가

3 Nisseki, Idemitsu, Nissan

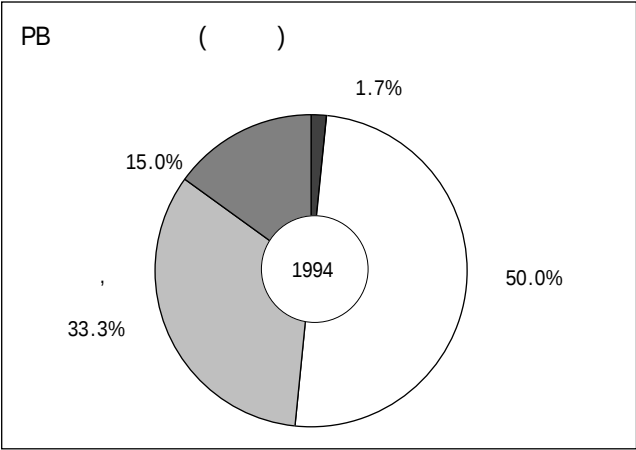

PB (: M/T)						
	1989	1990	1991	1992	1993	1994
	45,000	45,000	45,000	45,000	45,000	62,000
	38,900	38,600	40,700	40,500	42,900	57,300
	25,500	23,100	24,500	23,800	21,300	20,000
	12,400	14,900	16,100	17,400	20,900	22,000
	37,900	38,000	40,600	41,200	42,200	42,000

Exxon PB 2 PB PB Amoco,

PB 89 3 8900 , 90 3 8600 , 91 4 700 , 92 4 500 , 93 4

2900 , 94 5 7000

89 2 5500 , 90 2 3100 , 91 2 4500 , 92 2 3800 , 93 2 1300 ,

94 2 3~6%가

89 1 2400 , 90 1 4900 20.2%, 91 1 6100 8.1%, 93 2 900 20.1%,
 94 2 2000 5.3% 가 .
 94
 가 .
 93 35%, 11%, 16%, 13%,
 10%, 15% 2 1300 .
 94 PB 4400 , 5 7300 , 24 1000 30 2700
 PB

PB (: M/T)			
	1992	1993	1994
	-	-	12,000
	5,300~6,400	7,500	8,300

PB (1994) (: M/T)						
		Nisseki	Idemitsu	Nissan	Amoco	Exxon
	12,000	27,000	25,000	10,000	198,000	104,000
	4,400	25,000	23,000	9,300	158,000	83,000

5 7300 Nisseki가 2 5000 43.6% , Idemitsu가 2
 3000 40.1%, Nissan 9300 16.3% .
 Nisseki가 2 7000 , Idemitsu 2 5000 , Nissan 1 6
 2000 , Amoco 19 8000 , Exxon 10 4000 30 2000 . 94
 Amoco 15 8000 , Exxon 8 3000 .

PE, PP
 가
 가
 , SBR, BR, IIR, PIB
 PE, PP 가 , LDPE 가
 , PE, PP, PS,